


AMBER & WHITE

QUICK REFERENCE

TRAFFIC DIRECTOR PACKAGES

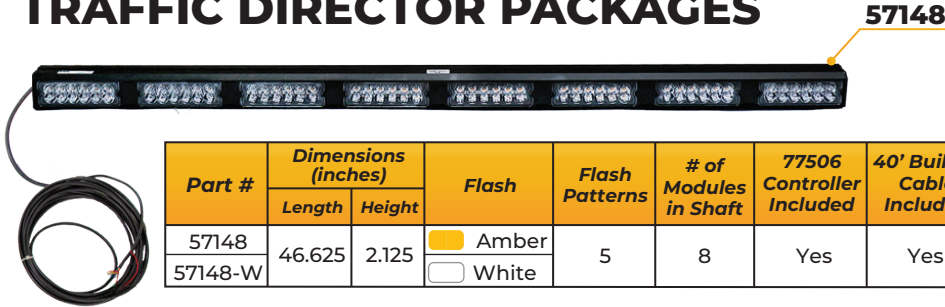

Part #	Dimensions (inches)		Flash	Flash Patterns	# of Modules in Shaft	77506 Controller Included	40' Built-in Cable Included
	Length	Height					
57148	46.625	2.125	 Amber	5	8	Yes	Yes
57148-W			 White				

MINIBARS



Part #	Profile	Dome	Lens	Flash	Voltage	Flash Patterns	Warranty
16194	Low	Clear	Clear		12-24Vdc	12	3 Year
16394			Amber/Clear			26	10 Year
16372							
S16372	Slim		Clear			12	3 Year
S16394							
S16194							

BEACONS



Part #	Profile	Lens	Flash	Voltage	Mounting	Flash Patterns
22330	Medium	Clear	 Amber/White	12-24V	Permanent	Quad Flash
22117-A/W	Low					

LIGHTBARS



Part #	Length	Height	Flash	Lens Material	Base Material	Temperature rating
26010-47	47"	7.9"	 Amber/White	Polycarbonate	Aluminum	-30°C to +60°C
26010-60	60"					

**Models also include alley, take down, STT lights as well as traffic directing patterns.*

Notes



Part #	Flash	Power	Voltage	Beam Options	Mounting	Dimensions (millimeters) W x D x T
93640-9	 Amber/ White	140W	10-30V	Spot Beam Driving Beam Position Light Warning Light	Bottom Mounted Bracket	220 x 87.6 x 237



Part #	Flash	Lens	Type	Amps	Patterns	Dimensions (millimeters) L x W x D	Heated Lens
80040-A/W	 Amber/ White	Clear	6" Oval	0.5	17	165 x 57.5 x 23.4	Yes
80041-A/W			4" Round			110 x 23.4	



Part #	Flash	# of LEDs	Amps	# Flash Patterns	Dimensions (millimeters) L x W x H	SAE Class
80081	 Amber/White	6	3	19	127.5 x 27.8 x 17.2	N/A
80281	 Amber/White		2	23	112.6 x 28.1 x 9	1



Part #	Centre LEDs	Halo LEDs	Amps	# Flash Patterns	Mounting	Dimensions (millimeters) L x W x H
83026	 White	 Amber	2	14	Surface	132 x 50 x 18.8
83062	 Amber	 White				